

PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : A61F 2/28, A61L 27/00	A1	(11) International Publication Number: WO 00/45747 (43) International Publication Date: 10 August 2000 (10.08.00)
(21) International Application Number: PCT/US99/02561 (22) International Filing Date: 5 February 1999 (05.02.99) (71) Applicant: OSTEOTECH, INC. [US/US]; 51 James Way, Eatontown, NJ 07724 (US). (72) Inventors: BOYCE, Todd, M.; 515 Wellington Place, Aberdeen, NJ 07747 (US). MANRIQUE, Albert; 8 Winthrop Drive, Manalapan, NJ 07726 (US). SCARBOROUGH, Nelson, L.; 47 Lambert Johnson Drive, Ocean, NJ 07712 (US). RUSSELL, James, L.; 57 Paag Circle, Little Silver, NJ 07737 (US). (74) Agents: DILWORTH, Peter, G. et al.; Dilworth & Barrese, 333 Earle Ovington Boulevard, Uniondale, NY 11553 (US).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>

(54) Title: BONE-DERIVED IMPLANT FOR LOAD-SUPPORTING APPLICATIONS

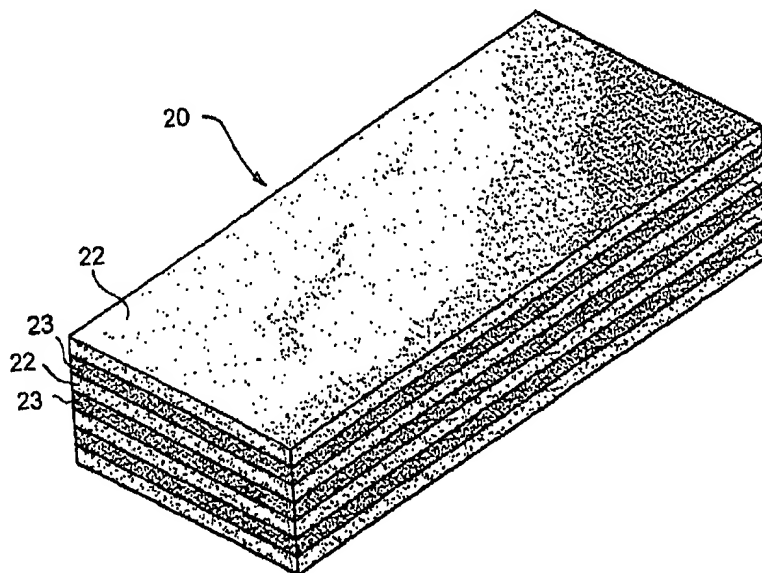

(57) Abstract

A bone-derived implant (20) is provided which is made up of one or more layers (22, 23) of fully mineralized or partially demineralized cortical bone and, optionally, one or more layers (22, 23) of some other material. The layers (22, 23) constituting the implant (20) are assembled into a unitary structure to provide an implant (20) exhibiting good overall load-supporting properties.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

Description

5

10

THIS PAGE BLANK (USPTO)

15

20

25

30

35

40

45

50

55

5

BONE-DERIVED IMPLANT FOR LOAD-SUPPORTING APPLICATIONS

10

BACKGROUND OF THE INVENTION

Technical Field

15

5

20

25

10

30

The present invention relates to a bone-derived implant fabricated at least in part from strength-imparting cortical bone and intended for use in the repair, replacement and/or augmentation of various portions of animal or human skeletal systems. More particularly, this invention relates to a bone-derived implant which is made up of two or more layers at least one of which is fully mineralized or partially demineralized cortical bone and, optionally, one or more layers fabricated from some other material. The individual layers constituting the implant are assembled into a unitary structure capable of supporting loads.

Description of the Related Art

35

15

40

45

50

55

The use of autograft bone, allograft bone or xenograft bone is well known in both human and veterinary medicine. See Stevenson et al., *Clinical Orthopedics and Related Research*, 323, pp. 66-74 (1996). In particular, transplanted bone is known to provide support, promote healing, fill bony cavities, separate bony elements such as vertebral bodies, promote fusion and stabilize the sites of fractures. More recently, processed bone has been developed into shapes for use in new surgical applications, or as new materials for implants that were historically made of non-biologically derived materials.

5 U.S. Patent No. 4,678,470 describes a non-layered bone grafting material
produced from bone by a process which includes tanning with glutaraldehyde. The
bone may be pulverized, used as a large block or machined into a precise shape.
10 The tanning stabilizes the material and also renders it non-antigenic. The bone
material may also be demineralized.
5

15 The use of a continuous sheet of demineralized bone or partially
demineralized bone is described in U.S. Patent No. 5,556,430; however, the sheet
must be sufficiently flexible, therefore sacrificing strength, in order to conform to
the skeletal site to which it is applied.
20

10 The surgically implantable sheet described in U.S. Patent No. 5,507,813 is
formed from elongate bone particles, optionally demineralized, containing
25 biocompatible ingredients, adhesives, fillers, plasticizers etc.

U.S. Patent No. 4,932,973 discloses an artificial organic bone matrix with
30 holes or perforations extending into the organic bone matrix. These holes or
perforations are indicated to be centers of cartilage and bone induction following
15 implantation of the bone matrix.

35 U.S. Patent No. 4,394,370 discloses a one-piece sponge-like bone graft
material fabricated from fully demineralized bone powder or micro particulate
bone, and reconstituted collagen. The sponge-like graft is optionally cross-linked
40 with glutaraldehyde.
20

Another one-piece porous implant is described in U.S. Patent No. 5,683,459. The implant is made up of a biodegradable polymeric macrostructure, which is structured as an interconnecting open cell meshwork, and a biodegradable polymeric microstructure composed of chemotactic ground substances such as hyaluronic acid.

SUMMARY OF THE INVENTION

The present invention provides a long felt need in the field by providing a bone-derived implant capable of supporting loads and, in a preferred embodiment, through its bone healing activity and ability to incorporate medically/surgically useful substances at a surgical site to promote and/or accelerate new bone growth.

It is therefore an object of the present invention to provide a bone-derived implant made up of a plurality of superimposed layers, fixed to each other into a unitary structure, and possessing compression strength characteristics approximating those of natural bone.

It is another object of the invention to provide a bone implant possessing a network of pores, apertures, perforations, channels or spaces which permits and encourages penetration by endogenous and exogenous bone healing materials and blood supply, and simultaneously provides a means for incorporating one or more bone healing substances.

It is yet a further object of the present invention to provide a bone-derived implant which can be fashioned into a variety of shapes and sizes which are not

5 limited by constraints imposed by the normal anatomical sizes and/or types of
donor bone which are available for the construction of the implant.

10 In keeping with these and other objects of the invention, there is provided a
bone-derived implant which comprises a plurality of superimposed layers
5 assembled into a unitary structure, at least one layer in the structure being a
compression-strength imparting layer fabricated from nondemineralized cortical
15 bone or partially demineralized cortical bone.

20 The bone-derived implant of the present invention possesses a significant
advantage over prior art bone and bone-derived implants in its ability to
10 approximate the mechanical strength characteristics of natural bone and to permit
gradual transfer of load-bearing support therefrom to newly formed bone tissue
25 over time.

Another important advantage of the bone-derived implant herein over prior
30 art implants lies in its ability to function as a carrier for, and effectively
15 incorporate, one or more medically/surgically useful substances that promote new
bone growth and/or accelerate healing.

35 The term "osteogenic" as used herein shall be understood to refer to the
ability of a substance to induce new bone formation via the participation of living
40 cells from within the substance.

20 The term "osteoconductive" as used herein shall be understood to refer to
the ability of a substance or material to provide biologically inert surfaces which
45 are receptive to the growth of new host bone.

5 The term "osteoinductive" as used herein shall be understood to refer to the
ability of a substance to recruit cells from the host which have the potential for
10 repairing bone tissue.

BRIEF DESCRIPTION OF THE DRAWINGS

15 5 Various embodiments are described below with reference to the drawings
wherein:

FIG. 1 is a cross-sectional view of bone from the diaphyseal region which
20 has been sliced longitudinally into several cortical bone layers;

FIG. 2 is an enlarged perspective view of a bone-derived implant of the
25 10 invention possessing layers of fully mineralized cortical bone alternating with
layers of partially and/or fully demineralized cortical bone;

FIG. 3 is a partial view of the human vertebral column showing a dowel-
30 shaped bone-derived implant of the invention installed at an intervertebral site;

FIG. 4 is a view of the human skull showing a bone-derived implant of the
15 invention fashioned as a zygomatic bone replacement;

35 FIG. 5 is an enlarged perspective view of a lattice-like section of bone-
derived implant; and,

40 FIG. 6 is a partial view of the human vertebral column showing installation
of the bone-derived implant of Fig. 5 at an intervertebral site.

5

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

10

5

15

20

10

25

30

15

35

40

20

45

50

55

The bone-derived implant of the present invention comprises at least two superimposed layers at least one of the layers being a compression strength-imparting layer derived from nondemineralized cortical bone or cortical bone which has been only partially demineralized. When present as a compression strength-imparting layer, a partially demineralized cortical bone layer should exhibit a fairly high percentage of the compression strength of a comparable layer of nondemineralized cortical bone, e.g., preferably at least about 40, more preferably at least about 50 and still more preferably at least about 60 percent of such strength. Layers of partially demineralized cortical bone which exhibit significantly less than about 40 percent of the compression strength of a comparable layer of fully mineralized cortical bone can optionally be utilized in the bone-derived implant but in some capacity other than a load-bearing one. Depending on the thickness of the layers, there can be anywhere from 2 to about 200 layers overall in the bone-derived implant. The bone-derived implant can include layers of varying thicknesses, e.g., the compression strength-imparting layer(s) can be considerably thicker or thinner than any optional layer(s) that may be present. Thicknesses ranging from about 0.5 to about 20, and preferably from about 1.5 to about 15mm can advantageously be used. In general, the number and thickness of the compression-strength imparting layers in a given bone-derived implant will be such as to provide an overall compression strength for the implant of from about 25 to about 250, and preferably from about 100 to about 200 MPa.

5 The sources of cortical bone for the bone-derived implant of this invention
are preferably allogenic but also include xenogenic sources such as bovine and
porcine bone. Where partially or fully demineralized cortical bone is utilized,
10 such bone can be obtained employing known demineralization techniques, e.g.,
5 those employing strong acids such as hydrochloric acid as described in Reddi et
15 al., *Proc. Nat. Acad. Sci.* 69, pp. 1601-5 (1972), herein incorporated by
reference. The extent of demineralization is a function of the strength of the acid
solution, the shape of the bone and the duration of the demineralization treatment.
20 Reference in this regard may be made to Lewandrowski et al., *J. Biomed*
10 *Materials Res*, 31, pp365-372 (1996), also incorporated herein by reference. The
25 use of partially or fully demineralized bone can be beneficial herein since such
substances exhibit greater initial osteogenic and/or osteoinductive activity than
fully mineralized bone.

30 The compression strength-imparting layer(s) of the bone-derived implant
15 can be provided as monolithic sections of bone or as multi-sectional layers built
up from two or more subsections, e.g., joined to each other in edge-to-edge
35 fashion in a manner which is analogous to planking. In this way, relatively large
compression strength-imparting layers can be constructed from smaller bone
40 sections to provide an implant whose overall size is not limited by the size and/or
20 shape of the cortical bone which is available for its construction.

45 Assembling the superimposed layers into a strong unitary structure can be
accomplished by a variety of means/procedures, e.g., application of known and
conventional biologically compatible adhesives such as the cyanoacrylates; epoxy-

5 based compounds, dental resin sealants, dental resin cements, glass ionomer
cements, polymethyl methacrylate, gelatin-resorcinol-formaldehyde glues,
10 collagen-based glues, inorganic bonding agents such as zinc phosphate, magnesium
phosphate or other phosphate-based cements, zinc carboxylate, etc., and protein-
5 based binders such as fibrin glues and mussel-derived adhesive proteins; the use of
mechanical fasteners such as pins, screws, dowels, etc., which can be fabricated
15 from natural or synthetic materials and bioabsorbable as well as nonbioabsorbable
materials; laser tissue welding; and, ultrasonic bonding. If desired, the layers of
the bone-derived implant can be provided with mechanically interengaging
20 features, e.g., tongue-and-groove or mortise-and-tenon elements, to facilitate their
assembly into the final product and/or to fix the layers to each other in a more
25 secured fashion. In addition to its compression strength-imparting fully
mineralized or partially mineralized cortical bone layers, the bone-derived implant
of this invention can optionally possess one or more layers formed from one or
30 more other materials. For example, these optional layers can be based on or
include highly or fully demineralized bone, graphite or pyrolytic carbon, a mineral
35 material such as hydroxyapatite, tricalcium phosphate, bioglass or other
bioceramic or natural or synthetic polymers, e.g., bioabsorbable materials such as
starches, polyglycolide, polylactide, glycolide-lactide copolymer, and the like, and
40 nonbioabsorbable polymers such as polymethyl methacrylate,
20 polytetrafluoroethylene, polyurethane, polyethylene and nylon.

5 If desired, the compression strength axis of one or more compression
strength-imparting layers can be offset relative to the compression strength axis of
one or more of the other compression strength-imparting layers in an arrangement
10 much like that of plywood. For example, compression strength axes of alternating
5 compression strength-imparting layers can be offset by up to 90° from the
compression strength axes of the other compression strength-imparting layers in
15 the implant in order to distribute the overall load-supporting capacity of the
implant in mutually transverse directions.

20 Bone-derived implants of any desirable size and/or configuration can be
10 provided, e.g., by machining or other mechanical shaping operations such as
press-molding. Computerized modeling of a specific implant followed by
25 computerized control of the shaping of the implant can be used to provide an
intricately shaped bone-derived implant which is custom-fitted to the intended site
30 of application with great precision.

15 The bone-derived implant can possess one or more cavities which, if
desired, can communicate with the surface of the implant through pores, apertures,
35 perforations or channels provided for this purpose and ranging in average diameter
from a few microns to several millimeters. Such cavities and their associated
40 pores, apertures, perforations and channels can be partially or completely filled
20 with one or more medically/surgically useful substances which promote or
accelerate new bone growth or bone healing due, e.g., to some osteogenic,
45 osteoconductive and/or osteoconductive effect. Useful substances of this kind

5 which can be incorporated into the bone-derived implant of this invention include,
e.g., collagen, insoluble collagen derivatives, etc., and soluble solids and/or
liquids dissolved therein, e.g., antiviral agents, particularly those effective against
10 HIV and hepatitis; antimicrobials and/or antibiotics such as erythromycin,
5 bacitracin, neomycin, penicillin, polymyxin B, tetracyclines, viomycin,
chloromycetin and streptomycins, cefazolin, ampicillin, azactam, tobramycin,
15 clindamycin and gentamicin, etc.; biocidal/biostatic sugars such as dextroal,
glucose, etc.; amino acids, peptides, vitamins, inorganic elements, co-factors for
protein synthesis; hormones; endocrine tissue or tissue fragments; synthesizers;
20 enzymes such as collagenase, peptidases, oxidases, etc.; polymer cell scaffolds
with parenchymal cells; angiogenic drugs and polymeric carriers containing such
25 drugs; collagen lattices; antigenic agents; cytoskeletal agents; cartilage fragments,
living cells such as chondrocytes, bone marrow cells, mesenchymal stem cells,
natural extracts, tissue transplants, bone, demineralized bone powder (or
30 "demineralized bone matrix" as it may also be referred to), autogenous tissues
15 such as blood, serum, soft tissue, bone marrow, etc.; bioadhesives, bone
morphogenic proteins (BMPs), transforming growth factor (TGF-beta), insulin-like
35 growth factor (IGF-1); growth hormones such as somatotropin; bone digestors;
antitumor agents; immuno-suppressants; permeation enhancers, e.g., fatty acid
40 esters such as laureate, myristate and stearate monoesters of polyethylene glycol,
20 enamine derivatives, alpha-keto aldehydes, etc.; and, nucleic acids. These and
45 similar medically/surgically useful substances can be incorporated into the bone-

5 derived implant of this invention or any of its constituent layers during any stage
of the assembly of the implant. Suitable methods of incorporation include coating,
immersion saturation, packing, etc. The amounts of medically/surgically useful
10 substances utilized can vary widely with optimum levels being readily determined
5 in a specific case by routine experimentation.

15 The bone-derived implant herein is intended to be applied at a bone defect
site, e.g., one resulting from injury, defect brought about during the course of
surgery, infection, malignancy or developmental malformation. The bone-derived
20 implant, suitably sized and shaped as required, can be utilized as a graft or
10 replacement in a wide variety of orthopaedic, neurosurgical and oral and
maxillofacial surgical procedures such as the repair of simple and compound
25 fractures and non-unions, external and internal fixations, joint reconstructions such
as arthrodesis, general arthroplasty, cup arthroplasty of the hip, femoral and
30 humeral head replacement, femoral head surface replacement and total joint
15 replacement, repairs of the vertebral column including spinal fusion and internal
fixation, tumor surgery, e.g., deficit filling, discectomy, laminectomy, excision of
35 spinal cord tumors, anterior cervical and thoracic operations, repair of spinal
injuries, scoliosis, lordosis and kyphosis treatments, intermaxillary fixation of
fractures, mentoplasty, temporomandibular joint replacement, alveolar ridge
40 augmentation and reconstruction, inlay bone grafts, implant placement and
20 revision, sinus lifts, etc. Specific bones which can be repaired or replaced with
45 the bone-derived implant herein include the ethmoid, frontal, nasal, occipital,

5 parietal, temporal, mandible, maxilla, zygomatic, cervical vertebra, thoracic
vertebra, lumbar vertebra, sacrum, rib, sternum, clavicle, scapula, humerus,
10 radius, ulna, carpal bones, metacarpal bones, phalanges, ilium, ischium, pubis,
femur, tibia, fibula, patella, calcaneus, tarsal and metatarsal bones.

5 Referring to the drawings, as shown in FIG. 1, the cortical portion of bone
10 taken from the diaphyseal region is cut into cortical bone layers 11 of varying
width by slicing the bone longitudinally. If desired, cortical bone layers 11 can be
15 further cut to uniform size and shape as in bone layers 22 of the implant 20 shown
in FIG. 2.

10 FIG. 2 illustrates a bone-derived implant 20 comprising alternating layers
of fully mineralized cortical bone 22 and partially demineralized cortical bone 23.
25 Alternatively, one or more layers 23 can be made from a material other than
partially demineralized bone such as fully demineralized bone or mineral
substances such as hydroxyapatite. The total thickness of the bone implant will
30 ordinarily be at least about 5, and preferably at least about 10, mm. Bone-derived
15 implant 20 can be cut, machined, and/or otherwise formed into any other desired
shape or dimension for implantation into a body. For example, a substantially
35 cylindrically shaped bone implant can be made for use as a long bone segment
replacement, e.g., for a femur. To form a cylinder, a substantially square or
40 rectangular bone-derived implant can be shaped on a lathe to the required
20 diameter. A cavity can be formed by removing material with, for example, a
45

5 drill, or, alternatively, a cavity can be formed by assembling appropriately
configured layers.

10 As shown in FIG. 3, cylindrical or dowel-shaped bone-derived implant 30
is shown inserted at the intervertebral fibrocartilage site on the anterior side of
5 vertebral column 31.

15 In FIG. 4, zygomatic bone-derived implant 40 is sized and shaped to form
part of the zygomatic arch and part of the interior orbit of skull 41.

20 As shown in the sectional view of FIG. 5, bone-derived implant 50 is built
up from elongate sections 51 of compression strength-imparting fully mineralized
10 or partially demineralized cortical bone of uniform square cross section and
arranged in lattice-wise fashion employing a suitable adhesive, e.g., of the
25 cyanoacrylate variety. Because of the open structure of implant 50 resulting from
the pattern of longitudinal channels 52 and transverse channels 53, the implant
30 permits the vascular penetration or host bone ingrowth therein and/or the diffusion
of one or more medically/surgical useful substances therefrom. Vertical channels
15 in the lattice-like array can, if desired, be partially or completely occupied by
35 appropriately-configured and dimensioned sections 54 fabricated from fully
mineralized or partially demineralized cortical bone as in cortical bone sections 51
or from any of the other substances disclosed herein. Fully assembled bone
40 implant 50 is shown installed in intervertebral space 61 of vertebral column 60 of
20 FIG. 6.

EXAMPLE 1

EXAMPLE 2

-14-

5

EXAMPLE 3

10

5

15

20

25

30

35

40

45

50

55

Claims

5

THIS PAGE BLANK (USPTO)

10

15

20

25

30

35

40

45

50

55

5

WHAT IS CLAIMED IS:

10

5

1. A bone-derived implant which comprises a plurality of superimposed layers assembled into a unitary structure, at least one layer in the structure being a compression strength-imparting layer fabricated from nondemineralized cortical bone or partially demineralized cortical bone.

15

20

2. The bone-derived implant of Claim 1 wherein the partially demineralized bone layer exhibits not less than about 40 percent of the compression strength of a comparable layer of fully mineralized bone.

25

10

3. The bone-derived implant of Claim 1 wherein the partially demineralized bone layer exhibits not less than about 50 percent of the compression strength of a comparable layer of fully mineralized bone.

30

35

4. The bone-derived implant of Claim 1 wherein the partially demineralized bone layer exhibits not less than about 60 percent of the compression strength of a comparable layer of fully mineralized bone.

40

15

5. The bone-derived implant of Claim 1 possessing at least two compression strength-imparting layers.

45

50

55

5 6. The bone-derived implant of Claim 1 possessing a total thickness of
at least about 5 mm.

10 7. The bone-derived implant of Claim 1 possessing a total thickness of
at least about 10 mm.

15 8. The bone-derived implant of Claim 1 possessing a cross section for
at least a portion of its length which is, or approximates, a circle, oval or polygon,
20 the implant optionally possessing a cavity for at least a portion of its length.

25 9. The bone-derived implant of Claim 8 wherein pores, apertures,
perforations or channels provide communication between the cavity and the surface
10 of the bone.

30 10. The bone-derived implant of Claim 1 configured as a graft.

35 11. The bone-derived implant of Claim 1 configured as a replacement
for a bone or section thereof.

40 12. The bone-derived implant of Claim 11 configured as an
15 intervertebral insert, a long bone, a cranial bone, a bone of the pelvis, or a bone
45 of the hand or foot or a section of any of the foregoing.

5 13. The bone-derived implant of Claim 1 wherein at least one
mechanical strength-imparting layer is provided as a monolithic bone section.

10 14. The bone-derived implant of Claim 1 wherein at least one
mechanical strength-imparting layer is provided as a multi-sectional bone section
15 5 wherein subsections of bone constituting the section are joined to each other in
edge-to-edge fashion.

20 15. The bone-derived implant of Claim 1 possessing upper and lower
major exposed surfaces, said surfaces being those of compression strength-
imparting layers.
25

10 16. The bone-derived implant of Claim 1 possessing at least one layer
30 fabricated in whole or in part from at least one material which is other than
nondemineralized or partially demineralized cortical bone.

35 17. The bone-derived implant of Claim 16 wherein the material
facilitates bone healing.

40 18. The bone-derived implant of Claim 17 wherein the material
15 possesses osteogenic, osteoconductive and/or osteoinductive activity.
45

5

10

5

15

20

25

10

30

35

40

15

45

50

55

19. The bone-derived implant of Claim 18 wherein the material is selected from the group consisting of partially demineralized bone, substantially fully demineralized bone, growth factors, bone morphogenic proteins, bone forming cells, precursor cells, genetic material, inorganic compounds and polymers.

20. The bone-derived implant of Claim 1 wherein each strength-imparting layer possesses the same or different average thickness in the range of from about 0.5 mm to about 20 mm.

21. The bone-derived implant of Claim 1 wherein each layer possesses the same or different average thickness in the range of from about 1.5 mm to about 15 mm.

22. The bone-derived implant of Claim 1 wherein the compression strength axes of at least two consecutive compression strength-imparting layers are offset relative to each other.

23. The bone-derived implant of Claim 1 wherein at least two consecutive compression strength-imparting layers are each made up of spaced-apart sections with the compression strength axes of the layers being offset relative

5 to each other in a lattice-like arrangement defining an array of channels in all three dimensions.

10 24. The bone-derived implant of Claim 23 wherein one or more vertical channels in the array is partially or completely occupied by one or more
15 5 appropriately configured and dimensioned sections of material.

25 25. The bone-derived implant of Claim 24 wherein the sections are fully mineralized bone or partially or fully demineralized bone.

26. The bone-derived implant of Claim 23 wherein at least one channel
25 10 contains an osteogenic, osteoconductive and/or osteoinductive material.

30 27. The bone-derived implant of Claim 26 wherein the material is selected from the group consisting of partially demineralized bone powder, substantially fully demineralized bone powder, growth factors, bone morphogenic
35 15 proteins, bone forming cells or precursor cells, genetic material, and inorganic compounds or polymers.

40

45

50

55

5 28. The bone-derived implant of Claim 5 wherein the axis of one or more
compression-strength axis of one or more compression strength-imparting layers is
offset relative to the compression strength axis of one or more of the other
10 compression strength-imparting layers.

15 5 29. The bone-derived implant of Claim 1 having a compression strength
of from about 25 to about 250 MPa.

20 30. The bone-derived implant of Claim 1 having a compression strength
of from about 100 to about 200 MPa.

25 31. The bone-derived implant of Claim 1 possessing from 2 to about
10 200 layers.

30 32. The bone-derived implant of Claim ¹⁶~~17~~ possessing means for
facilitating diffusion of bone healing material.

35 33. The bone-derived implant of Claim 32 wherein the means for
facilitating diffusion of bone healing material constitutes channels defined within
40 one or more layers.
15

45

50

55

5

34. The bone-derived implant of Claim 1 fabricated in whole or in part from allogenic and/or xenogenic cortical bone.

10

35. The bone-derived implant of Claim 1 wherein the superimposed layers are assembled with adhesive.

15

5

36. The bone-derived implant of Claim 1 wherein the superimposed layers are assembled with mechanical fasteners.

20

25

30

35

40

45

50

55

1/3

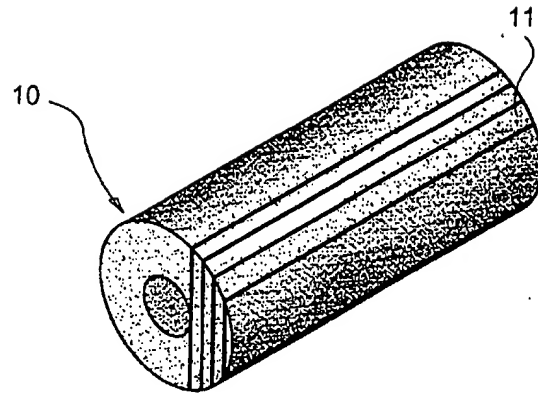


FIG. 1

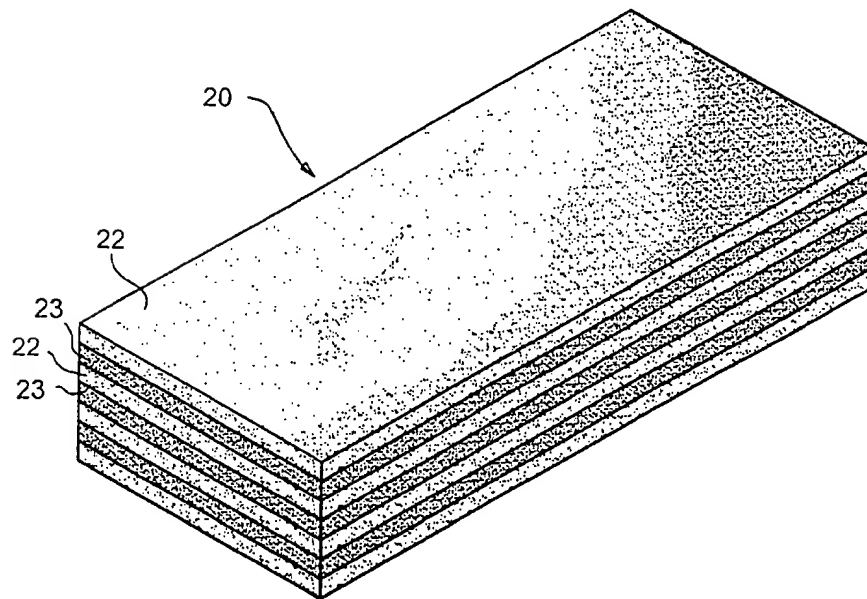


FIG. 2

2/3

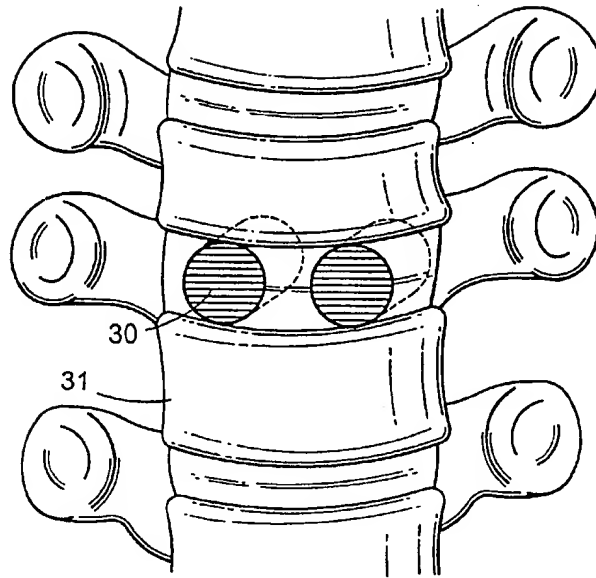


FIG. 3

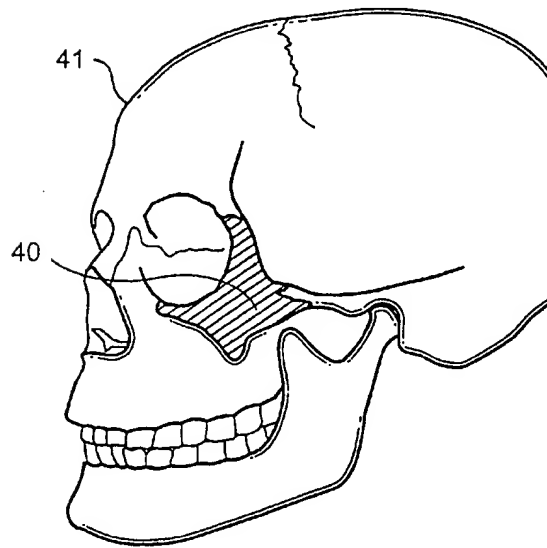


FIG. 4

3/3

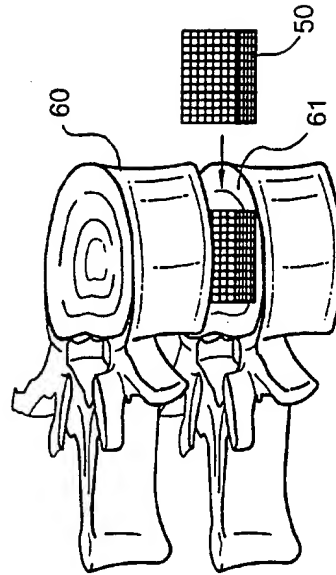


FIG. 6

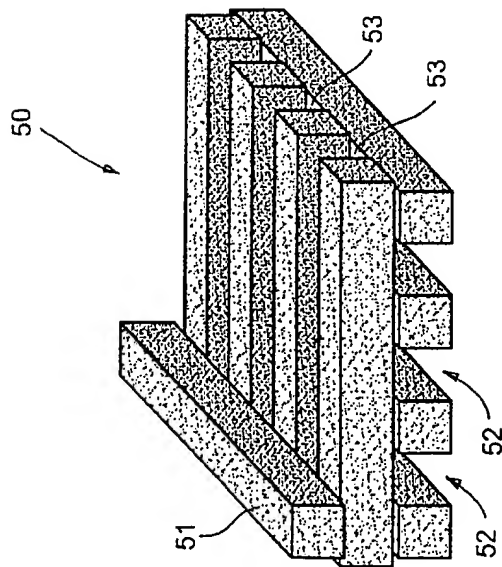


FIG. 5

INTERNATIONAL SEARCH REPORT

International Application No.
PCT/US 99/02561

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 A61F2/28 A61L27/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 A61F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 88 03417 A (MATERIAL CONSULTANTS OY) 19 May 1988 (1988-05-19) page 17, line 29 -page 18, line 4; figures 4,6C,7B, ---	1,5, 8-12,16, 31,34
Y	GB 2 175 506 A (AMERICAN HOSPITAL SUPPLY CORPORATION) 3 December 1986 (1986-12-03) abstract; figures ---	1,5, 8-12,16, 31,34 19,25,27
A	US 5 053 049 A (CAMPBELL) 1 October 1991 (1991-10-01) abstract ---	1
A	US 5 348 788 A (WHITE) 20 September 1994 (1994-09-20) the whole document ---	1,8,9,35
-/--		

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "Z" document member of the same patent family

Date of the actual completion of the international search

4 November 1999

Date of mailing of the international search report

10/11/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Klein, C

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 99/02561

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 621 018 A (KYOCERA CORPORATION) 26 October 1994 (1994-10-26) the whole document ---	1,12
A	DE 196 10 715 C (KIRSCH) 26 June 1997 (1997-06-26) abstract; figures ---	9,11
A	US 5 554 194 A (SANDERS) 10 September 1996 (1996-09-10) figure 10 ---	12
E	US 5 899 939 A (BOYCE) 4 May 1999 (1999-05-04) the whole document ---	1-36
A	EP 0 505 634 A (KYOCERA CORPORATION) 30 September 1992 (1992-09-30) ---	
A	US 5 514 378 A (MIKOS) 7 May 1996 (1996-05-07) ---	
A	EP 0 649 640 A (BHC LABORATORIES) 26 April 1995 (1995-04-26) ---	
A	US 5 556 430 A (GENDLER) 17 September 1996 (1996-09-17) cited in the application ---	
A	US 4 394 370 A (JEFFERIES) 19 July 1983 (1983-07-19) cited in the application -----	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/02561

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 8803417 A	19-05-1988	FI 864457 A	04-05-1988
		AT 85225 T	15-02-1993
		AU 606903 B	21-02-1991
		AU 8235787 A	01-06-1988
		CA 1297795 A	24-03-1992
		DE 3784060 A	18-03-1993
		EP 0289562 A	09-11-1988
		ES 2005049 A	16-02-1989
		JP 1501289 T	11-05-1989
		SU 1769715 A	15-10-1992
		US 5084051 A	28-01-1992
GB 2175506 A	03-12-1986	US 4627853 A	09-12-1986
		CA 1298935 A	21-04-1992
		DE 3617897 A	04-12-1986
		FR 2582517 A	05-12-1986
		JP 62032965 A	12-02-1987
US 5053049 A	01-10-1991	DE 3617898 A	04-12-1986
		FR 2582516 A	05-12-1986
		GB 2175807 A,B	10-12-1986
		JP 62032966 A	12-02-1987
US 5348788 A	20-09-1994	US 5455100 A	03-10-1995
		EP 0647439 A	12-04-1995
		JP 7171172 A	11-07-1995
		US 5487933 A	30-01-1996
		US 5728510 A	17-03-1998
EP 621018 A	26-10-1994	JP 6007388 A	18-01-1994
		DE 69326440 D	21-10-1999
		EP 0566427 A	20-10-1993
		US 5496372 A	05-03-1996
		US 5732469 A	31-03-1994
DE 19610715 C	26-06-1997	AU 1923797 A	10-10-1997
		WO 9734546 A	25-09-1997
		EP 0888096 A	07-01-1999
US 5554194 A	10-09-1996	CA 2175284 A	08-12-1996
		EP 0747019 A	11-12-1996
US 5899939 A	04-05-1999	NONE	
EP 505634 A	30-09-1992	JP 4303444 A	27-10-1992
		DE 69127354 D	25-09-1997
		DE 69127354 T	22-01-1998
		US 5458643 A	17-10-1995
		US 5314478 A	24-05-1994
US 5514378 A	07-05-1996	NONE	
EP 649640 A	26-04-1995	US 5522904 A	04-06-1996
		CA 2130866 A	14-04-1995
US 5556430 A	17-09-1996	US 5464439 A	07-11-1995
		US 5306304 A	26-04-1994
		DE 69111021 D	10-08-1995

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/02561

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5556430 A		EP 0483944 A ES 2076467 T	06-05-1992 01-11-1994
US 4394370 A	19-07-1983	US 4472840 A	25-09-1984